


# KLEIBERIT HotCoating®

## New dimensions in roll-to-roll coating

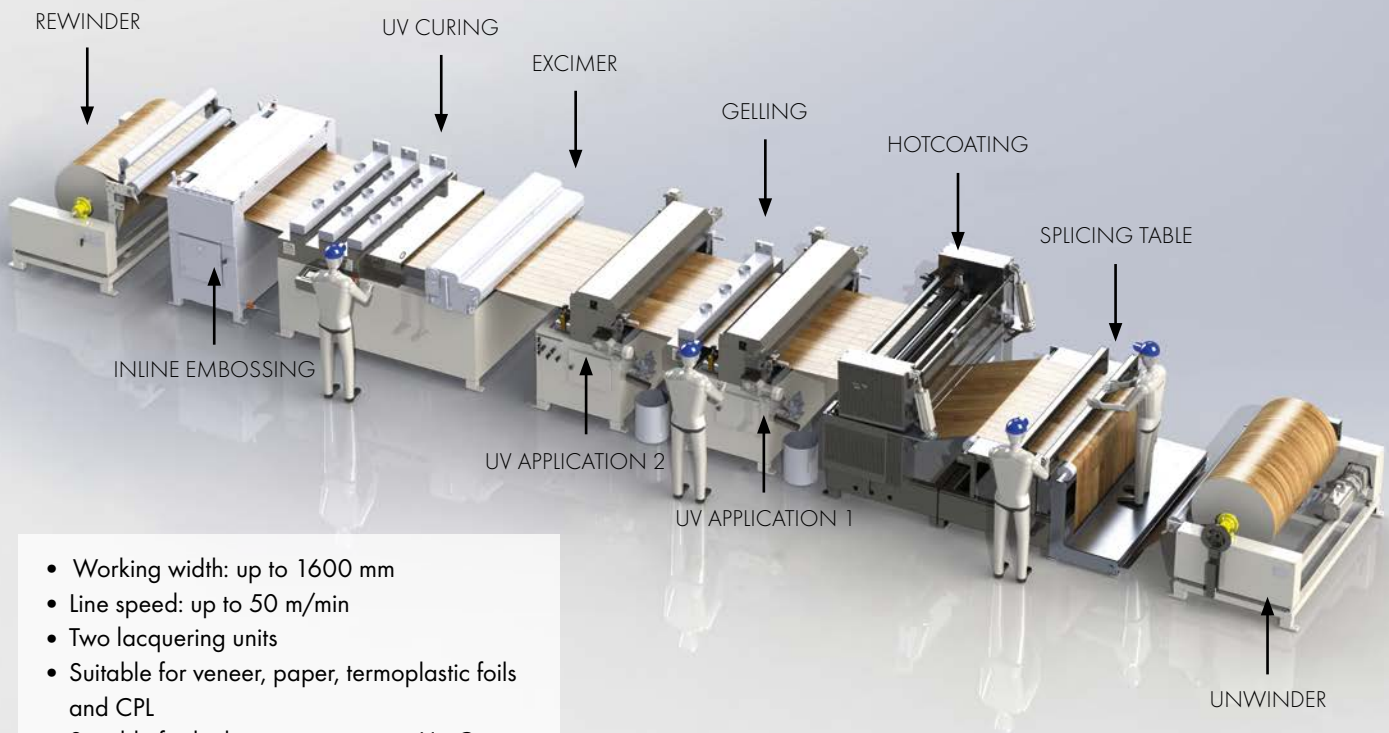

- Working width: up to 1600 mm
- Line speed: up to 50 m/min
- Two lacquering units
- Suitable for veneer, paper, termoplastic foils and CPL
- Suitable for highest wear resistant HotCoating with corundum
- Excimer system for super matte surfaces
- Surface finishing in combination with digital printing and embossing
- Innovative application possibilities in indoor and outdoor areas

### INNOVATION ROLL-TO-ROLL: MARKET EXPANSION BY WORKING WIDTH

